



MODEL	A	B4, B4-V	C4, C4-V	D4/D4 PLUS/ D4-V PLUS	E4/E4 PLUS E4-V PLUS	F4/F4 PLUS F4-V PLUS
Flow Rates						
Rated flow for NSF Std 55, Class B	--	4.3 gpm (16.3 lpm)	8.9 gpm (33.7 lpm)	8.9 gpm (33.7 lpm)	15.8 gpm (59.8 lpm)	26.1 gpm (98.8 lpm)
Rated flow at dose 30 mJ/cm ² @ 95% UVT	1.5 gpm (5.6 lpm)	5.6 gpm (21.2 lpm)	10.5 gpm (39.7 lpm)	10.5 gpm (39.7 lpm)	18.5 gpm (70.0 lpm)	30.5 gpm (115.5 lpm)

Operating Parameters						
Operating pressure	125 PSI (862 kPa)	125 PSI (862 kPa)	125 PSI (862 kPa)	125 PSI (862 kPa)	125 PSI (862 kPa)	125 PSI (862 kPa)
Ambient air temperature	32°F - 122°F (0°C - 50°C)	32°F - 122°F (0°C - 50°C)	32°F - 122°F (0°C - 50°C)	32°F - 122°F (0°C - 50°C)	32°F - 122°F (0°C - 50°C)	32°F - 122°F (0°C - 50°C)
Ambient water temperature	39.2°F - 104°F (4°C - 40°C)	39.2°F - 104°F (4°C - 40°C)	39.2°F - 104°F (4°C - 40°C)	39.2°F - 104°F (4°C - 40°C)	39.2°F - 104°F (4°C - 40°C)	39.2°F - 104°F (4°C - 40°C)
Hardness (max.)	120 ppm (7 grains per gallon)	120 ppm (7 grains per gallon)	120 ppm (7 grains per gallon)	120 ppm (7 grains per gallon)	120 ppm (7 grains per gallon)	120 ppm (7 grains per gallon)
Iron (max.)	0.3 ppm	0.3 ppm	0.3 ppm	0.3 ppm	0.3 ppm	0.3 ppm
UVT (min.)	75%	75%	75%	75%	75%	75%
Installation direction*	Vertical or horizontal	Vertical or horizontal	Vertical or horizontal	Vertical or horizontal	Vertical or horizontal	Vertical or horizontal

Electrical						
Voltage	120 - 230V AC	100 - 240VAC	100 - 240V AC	100 - 240V AC	100 - 240V AC	100 - 240V AC
Frequency	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz	50 - 60 Hz
Max. current	0.3 Amp	0.4 Amp	0.5 Amp	0.5 Amp	0.85 Amp	1.2 Amp
Max. power consumption	22 Watts	36 Watts	50 Watts	50 Watts	83 Watts	130 Watts
Lamp power	14 Watts	25 Watts	40 Watts	40 Watts	70 Watts	110 Watts

Dimensions						
Chamber	15.5" x 2.5" (39 x 6.5 cm)	14.5" x 4" (37 x 10cm)	20.5" x 4" (52 x 10cm)	20.5" x 4" (52 x 10cm)	30" x 4" (76 x 10cm)	44.25" x 4" (112.5 x 10cm)
Power Supply	2.8" x 3.3" (7 x 8 cm)	8.5" x 6" (22 x 15 cm)	8.5" x 6" (22 x 15 cm)	8.5" x 6" (22 x 15 cm)	8.5" x 6" (22 x 15 cm)	8.5" x 6" (22 x 15 cm)
Inlet & Outlet	3/8" NPT	3/4" NPT	3/4" NPT	3/4" NPT	1" NPT	1" NPT

Features						
Colour coded plug and play connections	--	--	--	--	--	--
CoolTouch fan/valve	--	--	--	--	--	--
Sensor with diagnostic test	--	--	--	D4 Plus / D4-V Plus	E4 Plus / E4-V Plus	F4 Plus / F4-V Plus
Solenoid Valve	--	--	--	Optional	Optional	Optional
Chamber material	304 SST	304 SST	304 SST	304 SST	316L SST	316L SST
Communication Ports (two, RJ45)	--	--	--	--	--	--
COMMcenter control package	--	--	--	--	--	--
Dynamic flow restrictor	--	--	--	D4-V / D4-V Plus	E4-V / E4-V Plus	F4-V / F4-V Plus
Audible alarm mute button	--	--	--	D4 Plus / D4-V Plus	E4 Plus / E4-V Plus	F4 Plus / F4-V Plus
Lamp reset button	--	--	--	D4 Plus / D4-V Plus	E4 Plus / E4-V Plus	F4 Plus / F4-V Plus
Lamp age indicator	--	--	--	D4 Plus / D4-V Plus	E4 Plus / E4-V Plus	F4 Plus / F4-V Plus
Lamp operation indicator	--	yes	yes	yes	yes	yes
Power supply operation indicator	--	yes	yes	yes	yes	yes
Solenoid operation indicator	--	--	--	--	--	--
Fan operation indicator	--	--	--	--	--	--
Sensor Reading Output	--	--	--	yes, sensor operation indicator	yes, sensor operation indicator	yes, sensor operation indicator

*systems with sensors must be installed vertically




Engineered to Higher Standards

Residential Applications

www.uvmax.com

VIQUA[™]
A TROJAN TECHNOLOGIES COMPANY
425 Clair Rd. W, Guelph, Ontario, Canada N1L 1R1
t. (+1) 519.763.1032 • tf. 1.800.265.7246 (US and Canada only)
f. (+1) 519.763.5069 • t. +31 73 623 8116 (Europe only)
e-mail: info@viqua.com www.viqua.com

CA0023 Copyright 2012 VIQUA - a Trojan Technologies Company.

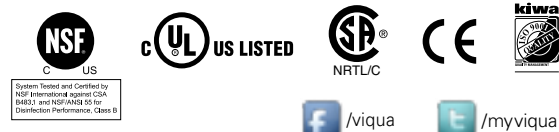

Engineered to Higher Standards.



The technology and care that goes into the development of our products is of the highest standards. Our UV purification systems have been designed and tested against the most rigorous validation and testing methods in the industry.

For 35 years, we have engineered and manufactured products that have set the standard in the industry. Our attention to detail and sound science ensures the best solutions to meet your drinking water disinfection needs long into the future.

VIQUA
We make tap water safe.



Unsurpassed Customer Support and Warranty

UVMAX™ systems undergo exhaustive testing and evaluations to ensure they inactivate harmful pathogens, including *E. coli*, *Cryptosporidium*, and *Giardia*.

- ① **Safety Cap and Special Lamp Plug**
The special lamp plug ensures that no one can power the UV lamp if it's not in the UV chamber.
- ② **Test of Sensor Operation**
User friendly sensor ensures safe UV levels are maintained.
- ③ **Unique Lamp/Sleeve Assembly**
Lamps and sleeves are assembled together for ease of handling. They can be replaced separately, in minutes and without tools.
- ④ **Handy Reference Card**
The reference card outlines the most important system functions and maintenance for quick, on-the-spot questions.
- ⑤ **Confidence in Proper System Operation**
Indicator lights show the status of system components. Warning lights appear when system maintenance is required.
- ⑥ **Helpful Lamp Replacement Reminder**
The lamp timer display counts down the days to annual lamp replacement. (models D4/E4/F4 + V Series)
- ⑦ **Lamp Timer Reset Button**
Once annual lamp replacement is completed, press this button to restart the lamp timer.
- ⑧ **Mute Button**
If a warning alarm sounds, simply press this button to silence the alarm.
- ⑨ **Genuine UV Lamp**
Our high output validated UV lamp is engineered to treat variable water conditions.

MODEL	A	B4, B4-V	C4, C4-V	D4/D4 PLUS D4-V PLUS	E4/E4 PLUS E4-V PLUS	F4/F4 PLUS F4-V PLUS
Consumables						
Lamp	602803	602804	602805	602805	602806	602807
Quartz Sleeve	602730	602731	602732	602732	602733	602734
Power Supply	650414 (120V) 650415 (230V)	650713-005	650713-006	650713-007 650713-008	650713-001 650713-002	650713-003 650713-004
Sensor	--	--	--	650703	650703	650703

WARRANTY Please visit www.uvmax.com for the comprehensive warranty for our UVMAX™ product line.