

Reverse Osmosis Watermakers



Essential


Essential is very easy to use, reliable and resistant. The watermaker is mounted in a solid structure made of stainless steel. Fresh water production from 80 to 160 litres per hour. The light and resistant carbon fibre pressure vessels (TÜV certified) can be installed separately. Electrical power consumption: 1.5 / 1.8 kW.

Also available in Slim configuration, with single components, for an easy installation in tight spaces.

Available with different electrical voltages and frequencies, on demand.



ESSENTIAL 500

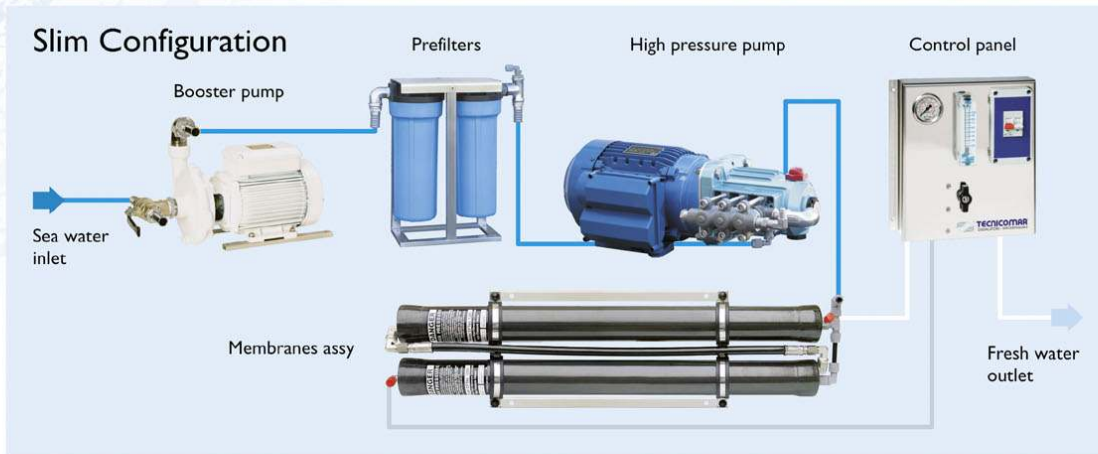

Technical Data

Model	Production per hour (litres / gallons)	Production per day (litres / gallons)	Voltage (Volt) / Frequency (Hz) Installed Power (kW)	Max Dimensions L x W x H (mm)	Weight (Kg)
ESSENTIAL 500	80 / 21.3	1,920 / 511	230VAC - 50 Hz* - 1.5 kW	680 x 397 x 260	30
ESSENTIAL 1000	160 / 42	3,840 / 1,014	230VAC - 50 Hz* - 1.8 kW	1180 x 397 x 260	33

*single phase - other voltages and frequencies available on demand

